



DANPALON® GLAZING MATERIAL

Translucent and Opaque
Microcell Panels with Standing
Seam Connection



FAÇADE



CLADDING



SKYLIGHT



OUTDOOR



SHADING



INTERIOR



NORTH AMERICA

SUPERIOR LIGHT TRANSMISSION FOR CUTTING-EDGE ELEGANCE



Fully waterproof connection system



Excellent resistance to hail



Complete UV protection



Excellent warranty protection



Flexible design options



Recyclable



THE ARCHITECTURE OF LIGHT

The sun: the best natural source of light and energy

Danpalon® harnesses this inexhaustible source, providing exceptional quality of light. Danpalon's glazing material features Microcell panels which offer customers the best combination of translucency and strength, transmitting an even diffusion of natural light, with superior durability and impact resistance.

The optimal solar and thermal balance

The Danpalon® panel provides exceptional quality of light, a rich non-industrial visual appeal and delivers thermal insulation and UV protection. Danpalon® contributes to optimal efficiency and significant savings in energy costs.

Centre Hospitalier Sud Francilien, France
Glazing: Danpalon® 16mm | Architect: Groupe-6 Architectes

DANPALON® PANEL

LIGHT DIFFUSION. STRENGTH. FLEXIBILITY.

SUPERIOR LIGHT DIFFUSION


The Microcell structure transmits an even diffusion of natural light, producing a rich look. Specifically designed for architectural daylight applications, the tight spacing between the ribs produces a superior quality of light, offering unique iridescence - reflecting and dispersing light in a way unmatched by any other material. Danpalon® Microcell panels are available in a range of thicknesses and widths.

EXCEPTIONAL DURABILITY AND THERMAL INSULATION

Danpalon® Microcell panels are manufactured with unique and innovative extrusion technology, providing ten times more cells than the majority of other sheets on the market. The smaller spans between the rib supports give customers the best combination of translucency and strength. Danpalon® Microcell panels are 100% leakproof, offering superior impact resistance and thermal insulation.


THE DANPALON MICROCELL STRUCTURE FEATURES 10 TIMES MORE CELLS THAN OTHER PANELS ON THE MARKET

The high concentration of cells provides Danpalon® Microcell with significantly lower thermal conductivity, improved mechanical properties and rigidity with high impact resistance.

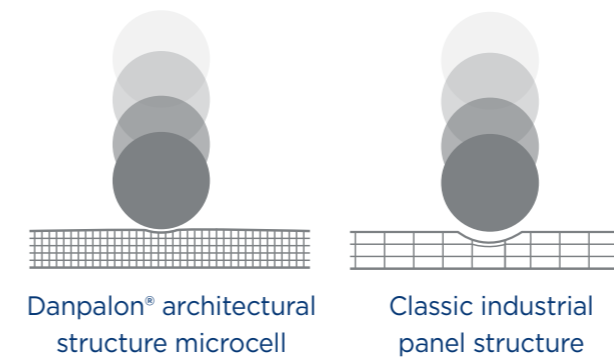

HIGH PERFORMANCE AND WEATHER RESISTANCE

Due to the tightness between the vertical supports, Danpalon® Microcell offers superior air and water performance, together with the highest resistance to impact and hail damage.

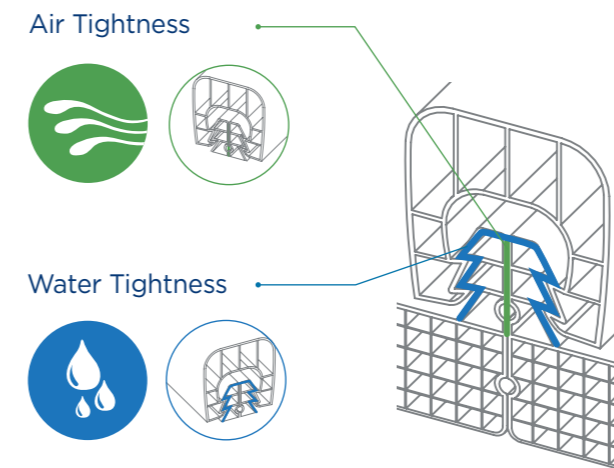


- Reinforced safety gauge
- Improved inertia for improved lightness
- The very best air and water performance available

BENEFITS

- Architectural grade material
- 100% waterproof
- Free thermal movement
- Easy installation
- High impact resistance
- Excellent thermal insulation
- Quality diffused daylight
- Cold bending of panels on site
- Reduced substructure
- Environmentally friendly product



Gymnasium Posco, Korea | Danpal® Single Glazing, 16mm | Architect: Posco A&C

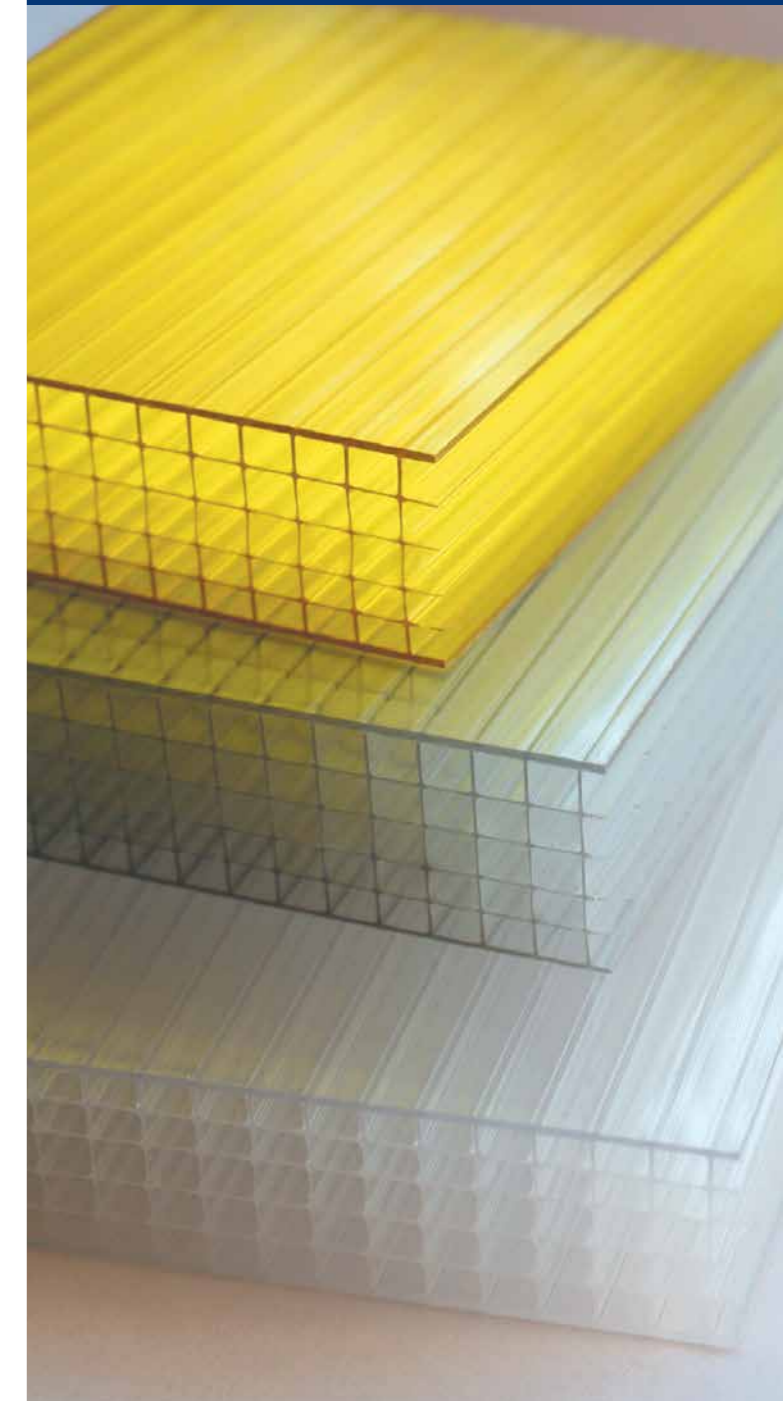

DANPALON® 3DLITE PANEL

BALANCE YOUR LIGHT


Block direct heat and glare

Optimizing natural light in buildings is an ongoing challenge. Danpalon 3DLITE is an advanced, innovative panel developed by Danpal®, enabling architects to design creatively while contributing to energy savings and increased lighting efficiency. Danpalon 3DLITE contains alternating integrated shading louvres which selectively control the sunlight to penetrate evenly during the day, while offering thermal insulation and a special dynamic look.



3DLITE STRUCTURE

Balancing daylight throughout the day

Danpalon 3DLITE allows the sun's rays to penetrate through at higher levels during the morning and afternoon, while reducing heat in the middle of the day. This fixed, cost-effective solution optimizes daylight in office buildings, shopping malls, schools, libraries, stadiums, museums, and more.

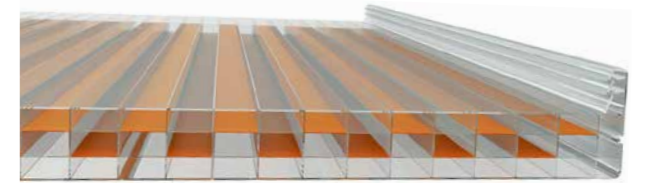

LIGHT LEVELS DURING THE DAY

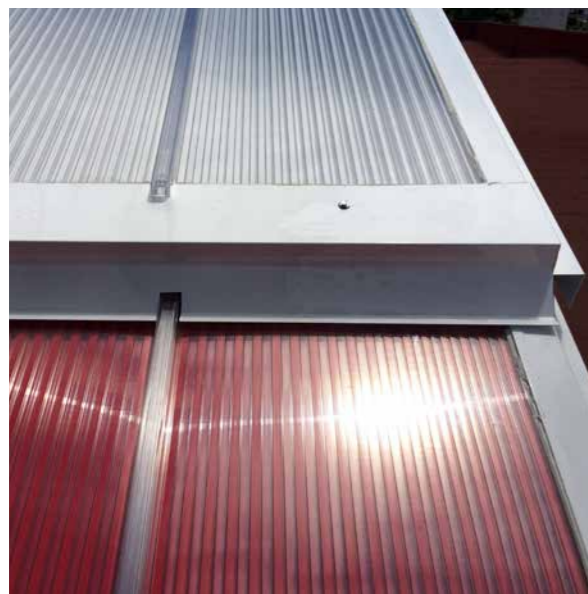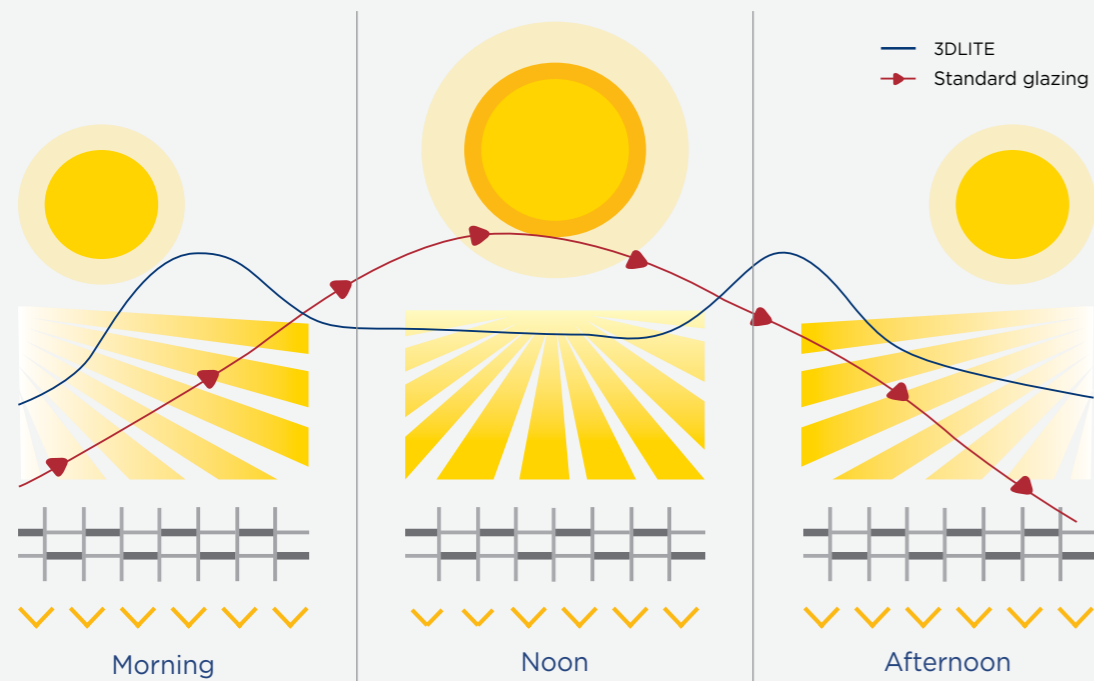

CIIDET College & University, Mexico | Glazing: Danpalon 3DLITE | IIFEQ Architects



Cafeteria Unitec Atizapan, Mexico | Glazing: Danpalon 3DLITE. Danpal 16mm




BENEFITS

- Dynamic light diffusion
- Flexible solution for summer and winter
- Optimizes daylight throughout the day
- Wide variety of colors
- Part of Danpal's systems

DANPALON® KINETIC PANEL

DUAL COLOR PANEL WITH DYNAMIC LOOK

Fascinating design is all a matter of perspective. And that's exactly what you get with Kinetic – the dynamic design solution from Danpal that enables the viewer to see a structure in one color from one direction, and another color from the other direction - providing a dynamic visual experience that changes depending on your perspective.

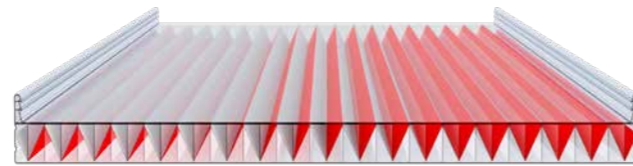


Give buildings a new look

With its appealing, innovative exterior, Kinetic revitalizes the appearance of any building - rejuvenating older buildings or adding innovation when planning a new building.



BENEFITS

- Dynamic look
- The ability to combine two colors in one panel
- Unparalleled choice of colors and color combinations
- Lightweight
- Part of Danpal's systems

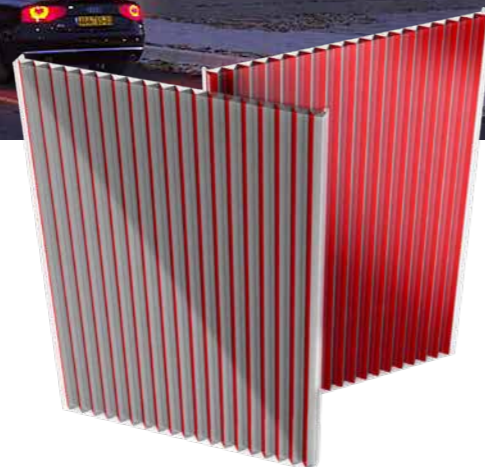

Variety of color combinations

FINISHES

DANPAL OFFERS A RANGE OF PANEL SURFACE FINISHES ACCORDING TO ENVIRONMENTAL CONDITIONS AND ARCHITECTURAL REQUIREMENTS

SOFTLITE FOR VISUAL COMFORT

Softlite finishing greatly diminishes glare effects. Softlite is a 100% permanent matte finish applied by co-extrusion on Danpalon® panels of any thickness and color. The Softlite finishing performance is independently validated to

ensure maximum visual comfort, regardless of the exposure and type of building.

- Reduced “neon” effect
- Greater light diffusion
- Increased feeling of comfort
- Reduces glare



HP - HIGH PROTECTION TREATMENT

Danpalon® HP is an advanced surface treatment that enables higher performance in areas of graffiti removal and protection against environmental pollution.

The Danpalon® HP surface treatment can be applied to most types of Danpalon® panels.



CHEMICAL RESISTANCE	WITHOUT HP	WITH HP
Gasoline	yes	yes
Toluene	no	yes
Acetone	no	yes
5% Ammonia	no	yes
10% Caustic Soda	no	yes
50% Caustic Soda	no	no
GaffiGauard 2010 (Guard Industrie France)	no	yes
GaffiGauard Decap Façade Guard (Guard Industrie France)	no	yes
GaffiGauard 2030 (Guard Industrie France)	no	yes

Open spot test according to ASTM D-1308. HP provides protection against long-term exposure. This information does not replace Danpal cleaning instruction and must be used carefully.




Veolia Energy, UK | Danpalon Single Glazing 16 mm
Architects: S'pace

DANPALON LOW E GLAZING

Allow better use of daylighting without adding more heat.


Infrared treatment is a co-extruded finish that significantly limits solar heat gain without affecting light transmission levels - creating efficient use of daylight.

It works by selectively blocking solar radiation, leading to a reduction in solar loads and enabling significant reductions in air conditioning costs and carbon emissions.

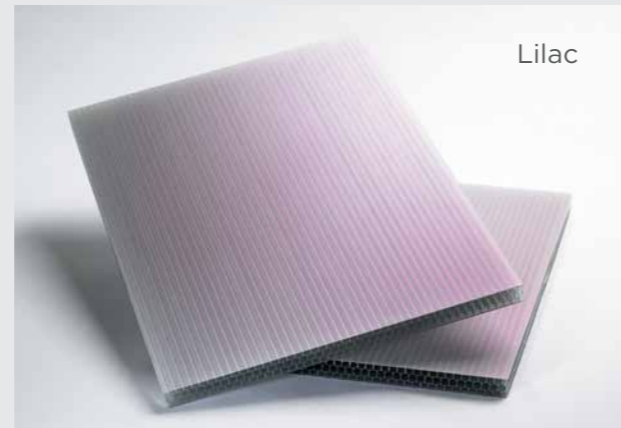


Lilac



IRIDESCENT APPEARANCE

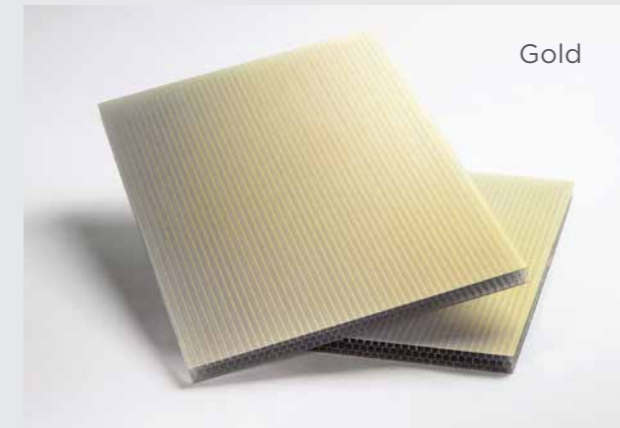


Gold

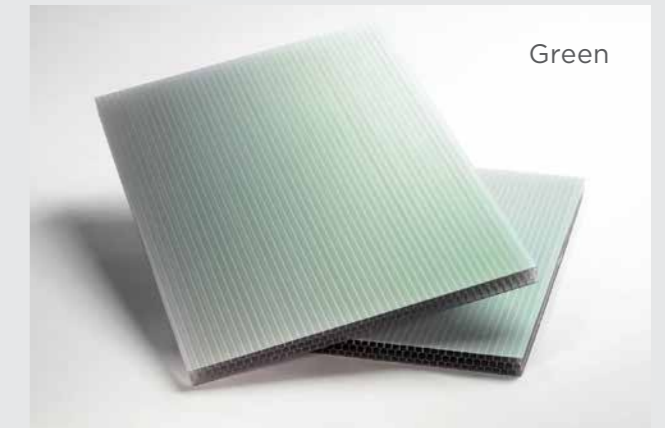

Green

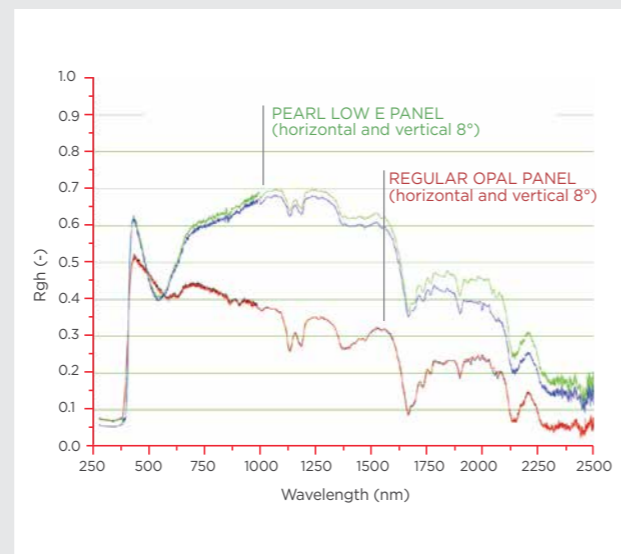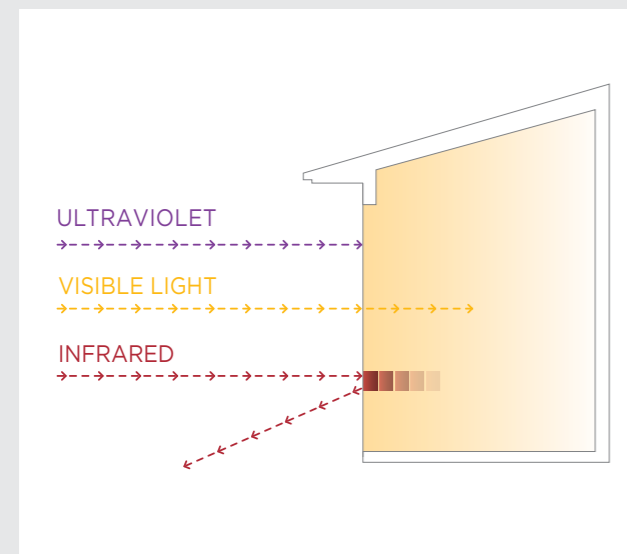

"PEARL LOWE" has improved IR reflectivity characteristics, compared to a similar panel without infrared treatment (as shown in the graph).

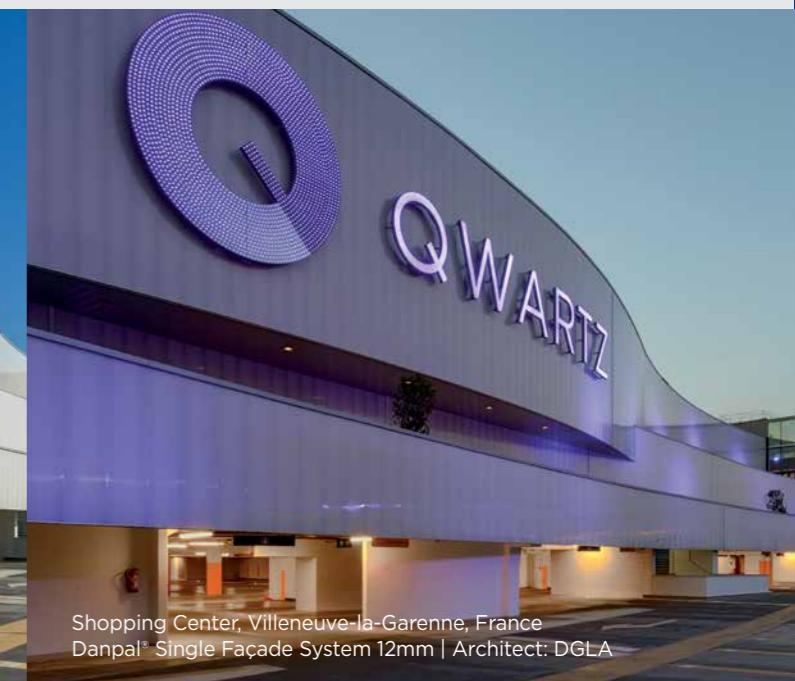

Shopping Center, Villeneuve-la-Garenne, France
Danpal® Single Façade System 12mm | Architect: DGLA




DANPALON® PANEL IDENTIFICATION - FOR FULL TRACEABILITY

Danpalon® is unique in offering details on the panel itself. These details include date of manufacture, enabling customers to easily see whether they are within their 10 year warranty period.


HEAT WELDED EDGES FOR PERFECT FINISHING

The welded edges provide a clean and effective solution that prevents water, dirt or insects from getting inside the microcells.

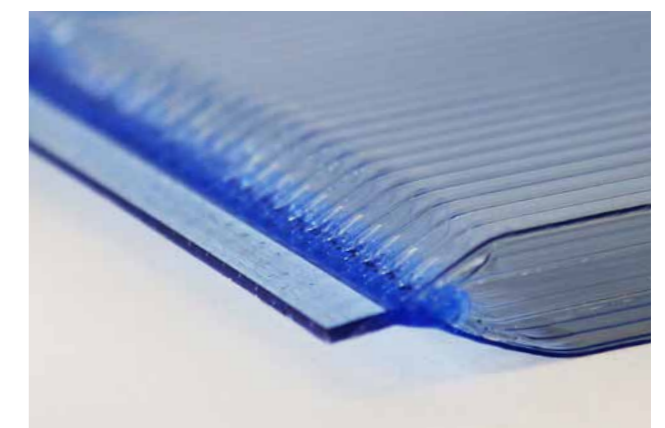

TRANSLUCENT AND OPAQUE COLORS

For bright colors with a metallic, lacquered appearance, choose the opaque panels available in a wide range of tints. With Danpal's translucent range, the appearance of the building changes with the light and reflections projected onto the Façade at different times of day.

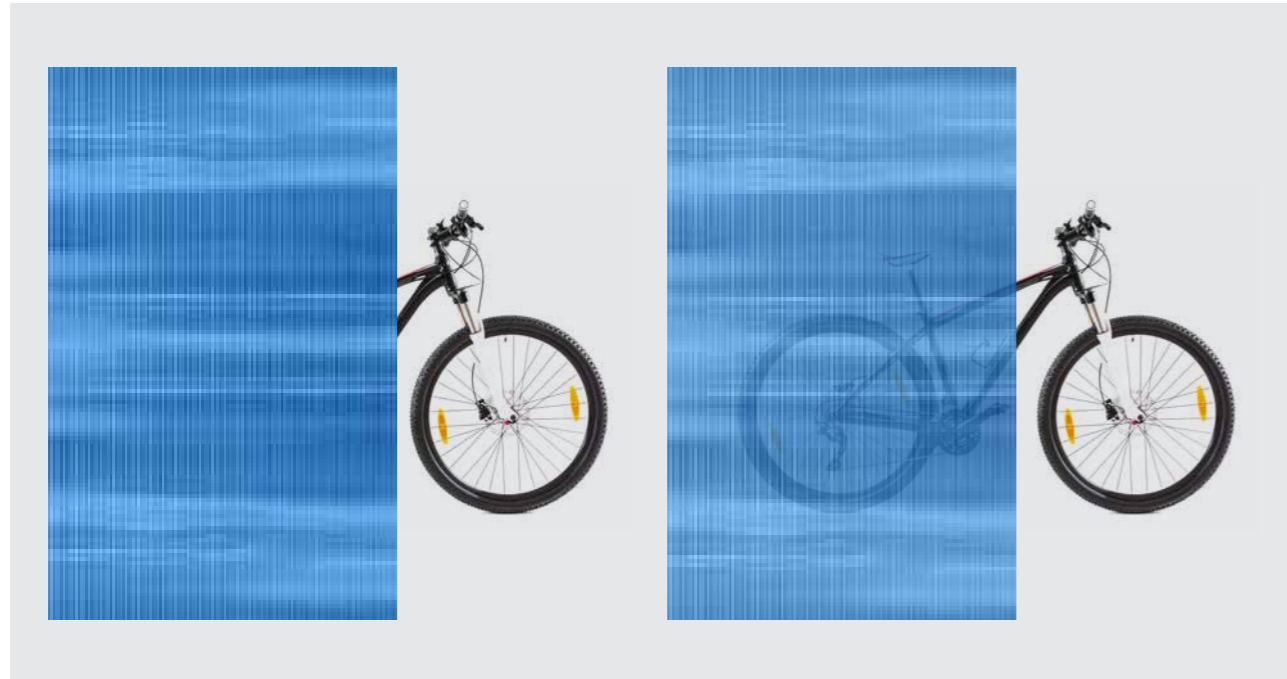

BI-COLOR FOR OPTICAL SPECIAL EFFECTS IN CLADDING

Our special bi-color option makes refracted light-effects possible, creating a unique 3-dimensional look to your cladding. The panels are available in the colors of your choice and are intended for use, with our Danpal VRS cladding system.



UNLIMITED DESIGN OPTIONS AND STUNNING EFFECTS

As well as creatively playing with light in structures, with Danpalon® textures you can also play with different prints and designs. Danpalon's textures and prints bring a wide array of design options for interior and exterior walls and ceilings. We provide high quality designs and stunning effects that are perfectly adapted and overlaid. This allows you to create any type of atmosphere or appearance, adding interest to structures and complementing the design.



Secondary School P. Mendes, Arques, France | Glazing: Danpalon® Printed | Architect: Soupey Toth Architecte



Nurcery School, France | Glazing: Danpalon® Printed, 16mm | Architect: Weber et Albrech




Odde Nursery School, Marseille, France
Glazing: Danpalon® Printed, 16mm | Architect: Camille Richard Lenoble

Liberty Creche, Le Petit Quevilly, France
Glazing: Danpalon® Printed, 16mm
Architect: Gérard Bourdon


LET OUR COLORS INSPIRE YOU

SHADES OF WHITE

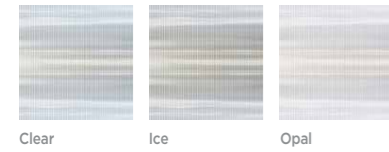


Clear Ice Opal

METALLIC

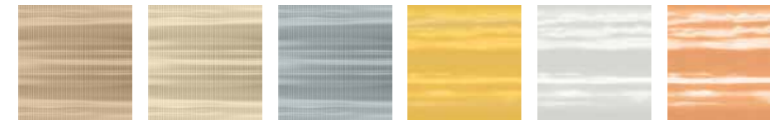

Amber Bronze Reflective Grey Gold Metallic Ice Copper

SOFTLITE SHADES OF WHITE

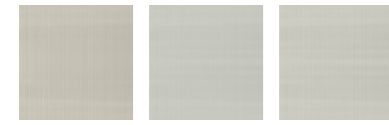


Softlite Clear Softlite Ice Softlite Opal

SOFTLITE METALLIC




Softlite Amber Softlite Bronze Softlite Reflective Grey Softlite Gold Softlite Ice Softlite Copper

COLORFUL

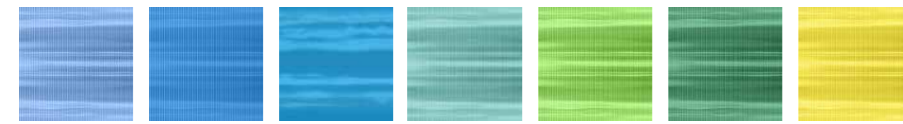


Blue Sapphire Blue Blue Arctique Green Lime Green Empire Green Yellow

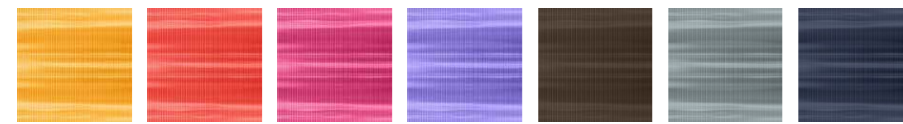

Orange Red Magenta Purple Brown Grey Black

SOFTLITE COLORFUL

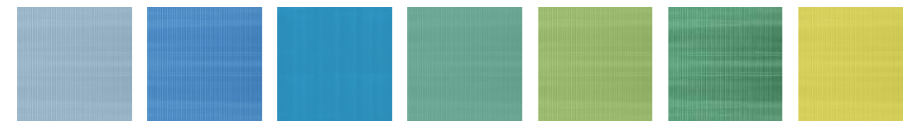

Softlite Blue Softlite Sapphire Blue Softlite Blue Arctique Softlite Green Softlite Lime Green Softlite Empire Green Softlite Yellow




Softlite Orange Softlite Red Softlite Magenta Softlite Purple Softlite Brown Softlite Grey Softlite Black

EXTRA SHADING




Red Purple Orange Dark Opal Dark Silver

COLORFUL OPAQUE



White Black Silver Reflective Blue

3DLITE

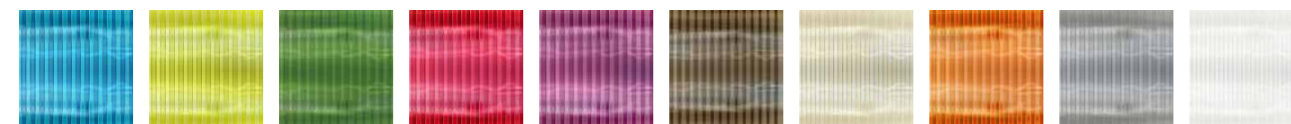

Sky Blue Citrus Green Fern Green Crimson Red Violet Purple Chocolate Brown Ivory Signal Orange Thunder Grey White

KINETIC



White | Sky Blue Violet Purple | Mist Grey White | Crimson Red Canary Yellow | Magenta Violet Purple | Chocolate Brown Dove Grey | Turquoise Citrus Green | Chocolate Brown Crimson Red | Sky Blue Fern Green | Canary Yellow Signal Orange | Thunder Grey

OPTICAL AND THERMAL PROPERTIES FOR STANDARD COLORS

	STANDARD		COMPACT 4MM	MULTICELL/ HONEYCOMB 8/10/12MM	MULTICELL 16/22MM	MULTICELL 35MM	50MM
	Clear	LT%	86	67	57	50	41
		ST%	79	62	53	47	39
		SR%	11	29	36	39	42
		SHGC	0.81	0.64	0.55	0.50	0.43
	Ice	LT%	55	58	47	44	33
		ST%	58	57	46	44	34
		SR%	20	30	35	38	41
		SHGC	0.62	0.60	0.50	0.48	0.39
	Reflective Grey	LT%	19	20	18	20	10
		ST%	16	16	19	17	9
		SR%	24	31	31	32	33
		SHGC	0.28	0.27	0.29	0.27	0.21
	Opal	LT%	34	35	21	20	13
		ST%	42	41	28	26	18
		SR%	31	39	45	46	46
		SHGC	0.47	0.45	0.34	0.32	0.25
	Green	LT%	69	51	44	39	32
		ST%	67	52	44	39	30
		SR%	11	23	28	31	35
		SHGC	0.71	0.57	0.5	0.45	0.37
	Blue	LT%	62	50	49	37	31
		ST%	72	57	51	43	37
		SR%	11	27	33	34	43
		SHGC	0.76	0.60	0.54	0.48	0.41
	Bronze	LT%	37	25	29	25	20
		ST%	41	27	31	27	23
		SR%	8	16	21	24	26
		SHGC	0.51	0.38	0.41	0.37	0.33
	Grey	LT%	41	28	31	27	22
		ST%	51	36	36	32	27
		SR%	9	19	28	30	33
		SHGC	0.59	0.45	0.43	0.39	0.35

View more Colors



LEGEND

LT - % of visible light transmission (400 - 700nm)

ST - % of total solar radiation transmission (300 - 2800nm)

SR - % of total solar reflection (300-2800nm)



SHGC - Solar Heat Gain Coefficient.

Total solar energy transmitted through the panel = %ST+0.2x[1-(%st+%sr)].

Tests were performed in accordance with ASHRAE 74-1988 procedures.

Figures are indicative and may change within manufacturers' production tolerances.

RANGE OF PANELS /CASSETTES

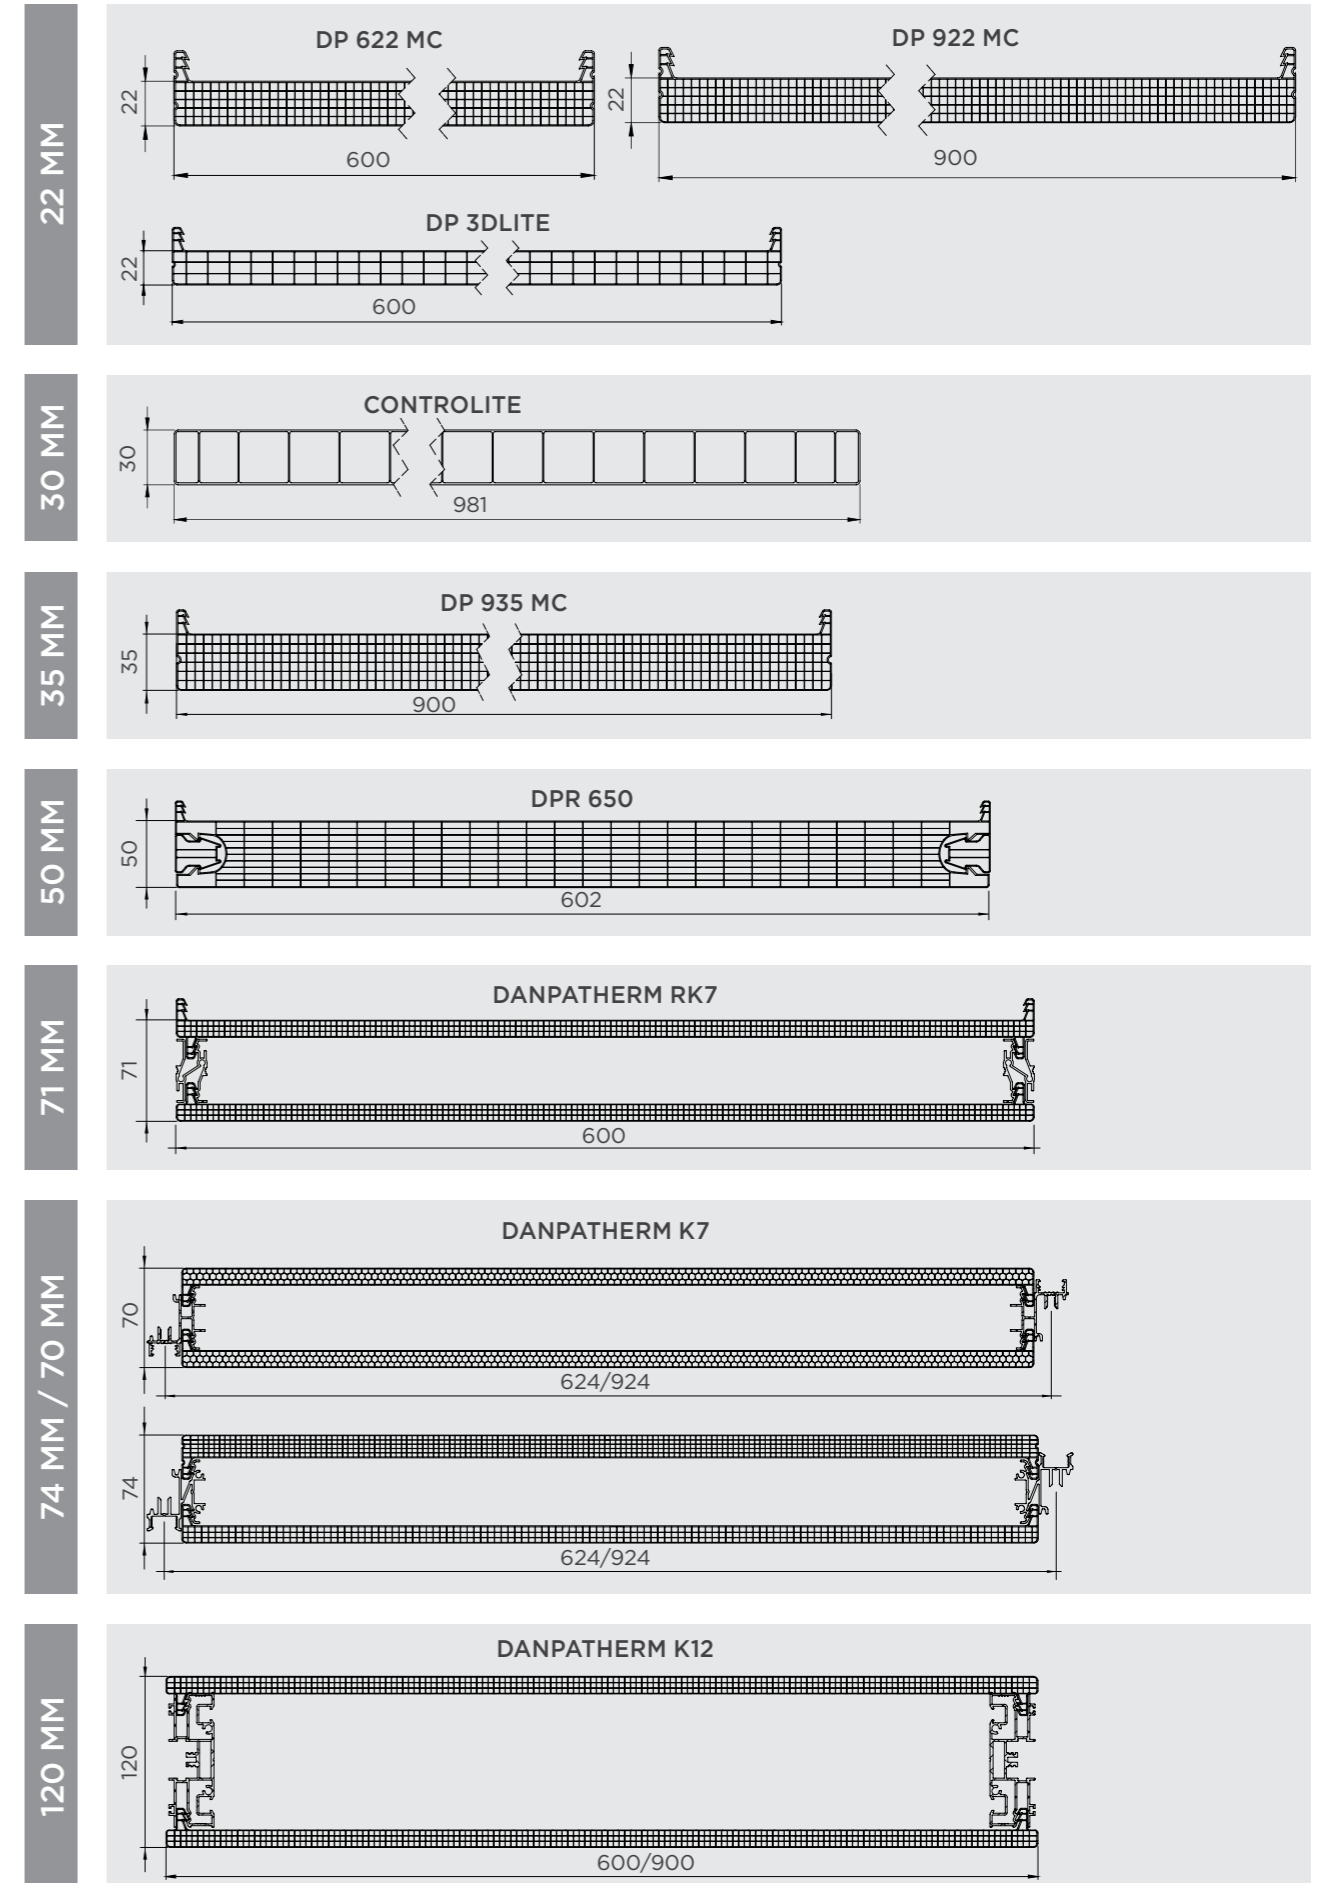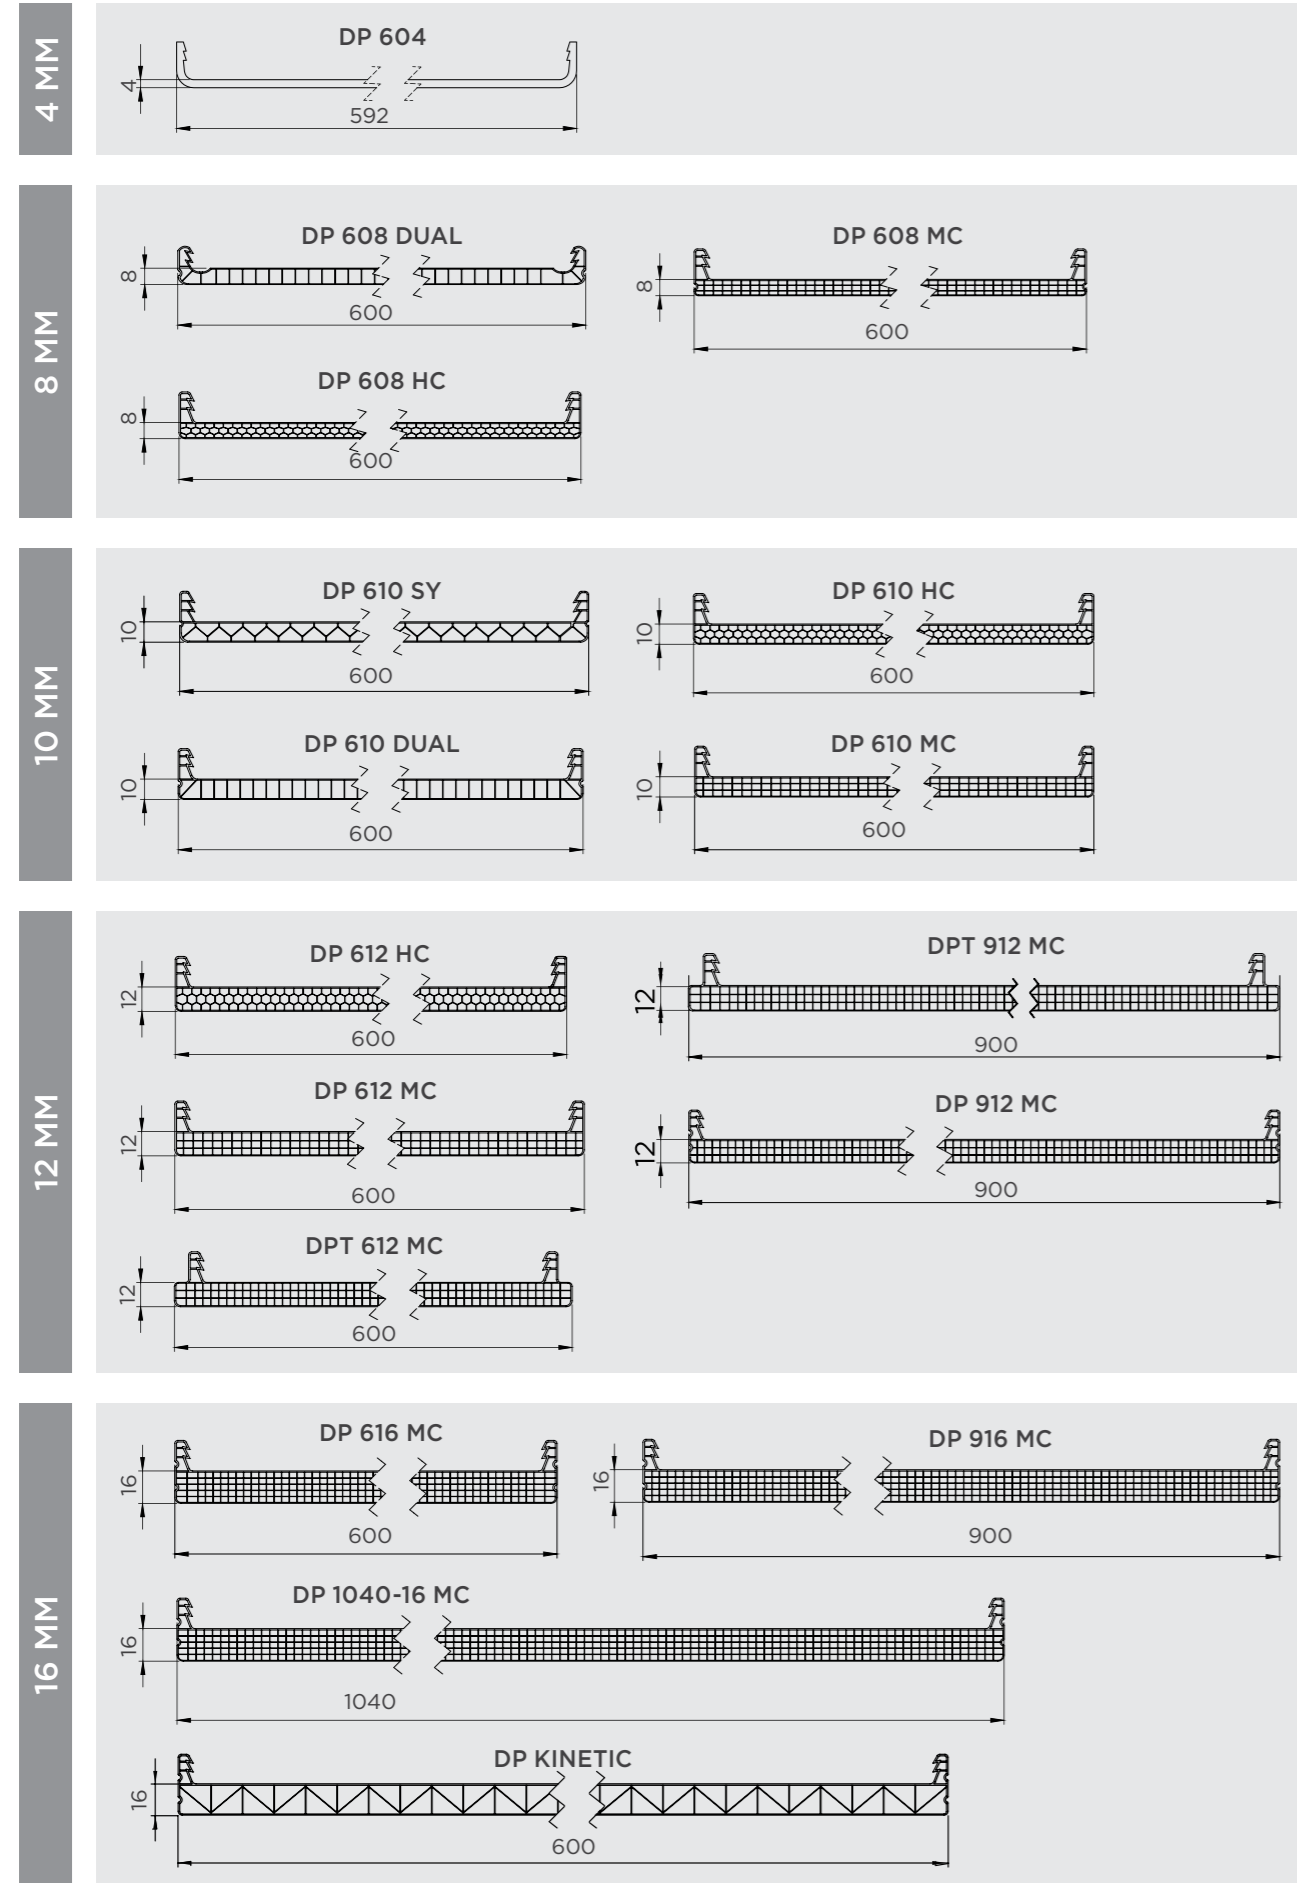

TEST DATA AND TECHNICAL SUMMARY

Test Description	Test Procedure	Results & Note
1. Flammability The data partially relates to flame retardant grades. European standards: <ul style="list-style-type: none"> Self - Ignition Smoke Density of Plastic Burning Extent Interior Flame Spread and Smoke Development 	EN 13501 – 1:2002 ASTM 1929 ASTM D-2843 ASTM D-635 ASTM E-84.	B-S1, d0 CC1 CC1 CC1 Class A
2. Weathering <ul style="list-style-type: none"> Weathering Evaluation 110mo Florida Weathering Evaluation Color Change Yellowing Index Light Transmission Heat Exposure Evaluation 	ASTM D4364	Successful exposure to concentrated natural sunlight radiation of 56000 MJ/M2(1540MJ/M2 of U.V.) at New River Site, Arizona
		Impact, Cyclic wind loading shall not decrease after 110 months of exposure to Florida weather
	ASTM D2244	No more that 3.0 units Delta E after 60 months
	ASTM D1925	No more than 10 points after 60 months
	ASTM D1003	Will not decrease more than 6% after 10 years
	300°F, 25mins.	The interior and exterior faces do not darken more than 0 units Delta L /ASTM D2244, 0 units yellowing index/ASTM D1925 and 0% light transmission / ASTM D 1003
3. Impact <ul style="list-style-type: none"> Sandbag impact test Concentrated load OSHA/CalOSHA 	ASTM E-822-81	Panel repels hailstones of 25mm at velocity 21m/sec - no penetration
	AS/NZS 4040.4-1996	Pass
	SPI (Method B)	220ft. lbs.
	PA 201-94	Successfully tested per S. Florida hurricane large missile cannon test at 350 Ft Lbs
	800 lbs in 1 sqft area	
4. Accelerated Delamination <ul style="list-style-type: none"> (Chaoter 42 of UBC Code] 	300°F, 25mins & sub - zero temp.	The faces do not become readily detached No delamination occurs under load
5. Vicat Softening Temperature	DIN 53460 Iso 306 VST/B	142°C
6. Long Service Temperature		-40°C to 120°C
7. Expansion / Contraction	Linear thermal expansion	0.065mm/m°C
8. Code Compliance (USA)	ICC ESR	ESR-5022
9. U.V. Filtration	Australian Standard No.1067-1990	Transmission Less Than 0.1%
10. ISO Quality Standard	SI ISO 9001	Danpalon® complies with Quality Management Standard SI ISO 9001

*Refer to technical information and consult our technical service department. Whenever reference is made to fire tests, the numerical rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

Danpal panels are produced with the **best** external protection against UV rays in the market, that ensures durability, mechanical properties and optical properties over time.

TECHNICAL FEATURES


	DANPALON® 4mm	DANPALON® 8mm	DANPALON® 10mm	DANPALON® 12mm	DANPALON® 16mm	DANPALON® 22mm	DANPALON® 35mm	DANPALON® 3DLITE	DANPALON® KINETIC	DANPALON® 50mm
Number of walls	1	4	4	4	6	6	7	4	3	11
Structure	Solid 4mm	Multicell/ Honeycomb	Multicell/ Honeycomb	Multicell/ Honeycomb	Multicell	Multicell	Multicell	IHL	IDL	Multicell
Width (mm)	600	600	600	600 900	600 900 1040	600 900	900	600	600	602
Width (inches)	23-5/8"	23-5/8"	23-5/8"	23-5/8" 35-7/16"	23-5/8" 35-7/16" 40-15/16"	23-5/8" 35-7/16"	35-7/16"	23-5/8"	23-5/8"	23-3/4"
Ug (W/m².K) CSTB calculated values	5.2	3	2.6	2.4	1.9	1.5	1.2	1.76	2.3	0.85
U-value (Btu/ hr-ft²-F)	0.92	0.53	0.46	0.42	0.33	0.26	0.21	0.31	0.41	0.15
Reaction to fire	B-s1,d0							B-s2, d0	B-s1, do	
Flame Spread/ Smoke Development ASTM E-84	Class A									
Minimum slope specific test	5° (or 9%)									
Minimum cold bending radius (m)	3.2m	2.5m	2.7m	2.8m	3.1m	3.5m	4.4m	5.0m	5.0m	5.4m
Minimum cold bending radius (ft)	10'-6"	8'-2"	8'-6"	8'-8"	10'	11'-4"	14'	16'-4"	16'-4"	17'-8"
Manufactured according to certification	ISO 9001, ISO 14001									
Ten-year warranty	Yes									
Evaluation Reports	ICC ESR 5022									
Impact and shock resistance	SOFT AND HARD BODY IMPACT D1-10J - M50,300J - M50,400J								N/A	
Technical Book	Specialised reviews to EN standards throughout by SOCOTEC / CSTB Technical Assessment Department of cladding and roofing / Annual monitoring of the production factory by CSTB								N/A	

Danpal is engaged in continuous product development and test results listed on the table are subject to change without notice. Please contact Danpal for more information <https://www.danpal.com>.

IDEAL FOR CUSTOMIZED AND UNITIZED SOLUTIONS

Our full service offering

- Project engineers and the sales force in your region will accompany you and follow up your projects, from their inception to completion.
- Our design office will assist and guide you in the implementation of the most suitable solution for your specific needs.
- The order processing and preparation service offers customized orders, reinforced packaging, accurate labelling and impeccable delivery.
- Our support service will promptly respond and assist you in finding solutions for your on-site challenges.
- We offer a full material warranty and are committed to meeting our customers' deadlines.

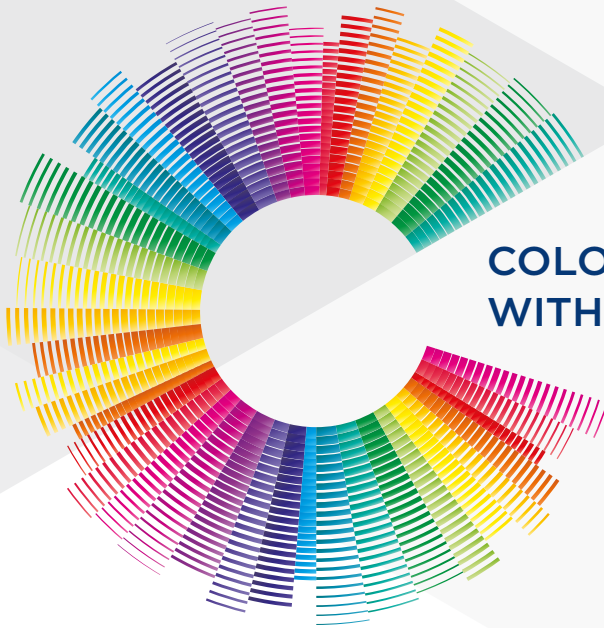

COLOR YOUR ATMOSPHERE WITH THE DANPAL® PALETTE

ABOUT THE COMPANY

Innovative light architecture systems for building envelopes

Danpal® are creators of exceptional light-transmitting architectural systems for building envelopes, providing optimal solar and thermal comfort.

For 50 years, our innovative systems have helped architects to transform light (both natural and artificial) into a powerful and versatile tool, for architectural creations that are internally and externally radiant.

An industry visionary, Danpal® are originators of the Danpalon® translucent panel standing seam system - a light architecture solution used around the world in commercial, education, transport, health, sports and high-tech projects.

Today, the company offers complete systems - providing total solutions for the building envelope. Danpal® designs, manufactures and distributes an unmatched range of daylighting systems for all types of building requirements - from Façades, cladding, roofs, Skylight, shading, to interior and outdoor applications.

Danpal® systems are built around innovative technologies, deep architectural know-how and the ever evolving needs of our clients. Operating in five continents, Danpal® inspires architectural creativity with its rainbow of light architecture solutions.

Danpalon® Glazing Material is an integral part of Danpal's range of systems - giving you a complete solution



FAÇADE



CLADDING



SKYLIGHT



OUTDOOR



SHADING



INTERIOR

www.danpal.com

Danpal North America | 3959 Bur Wood Drive, Suite 400 Waukegan IL 60085 | 312-724-8166

